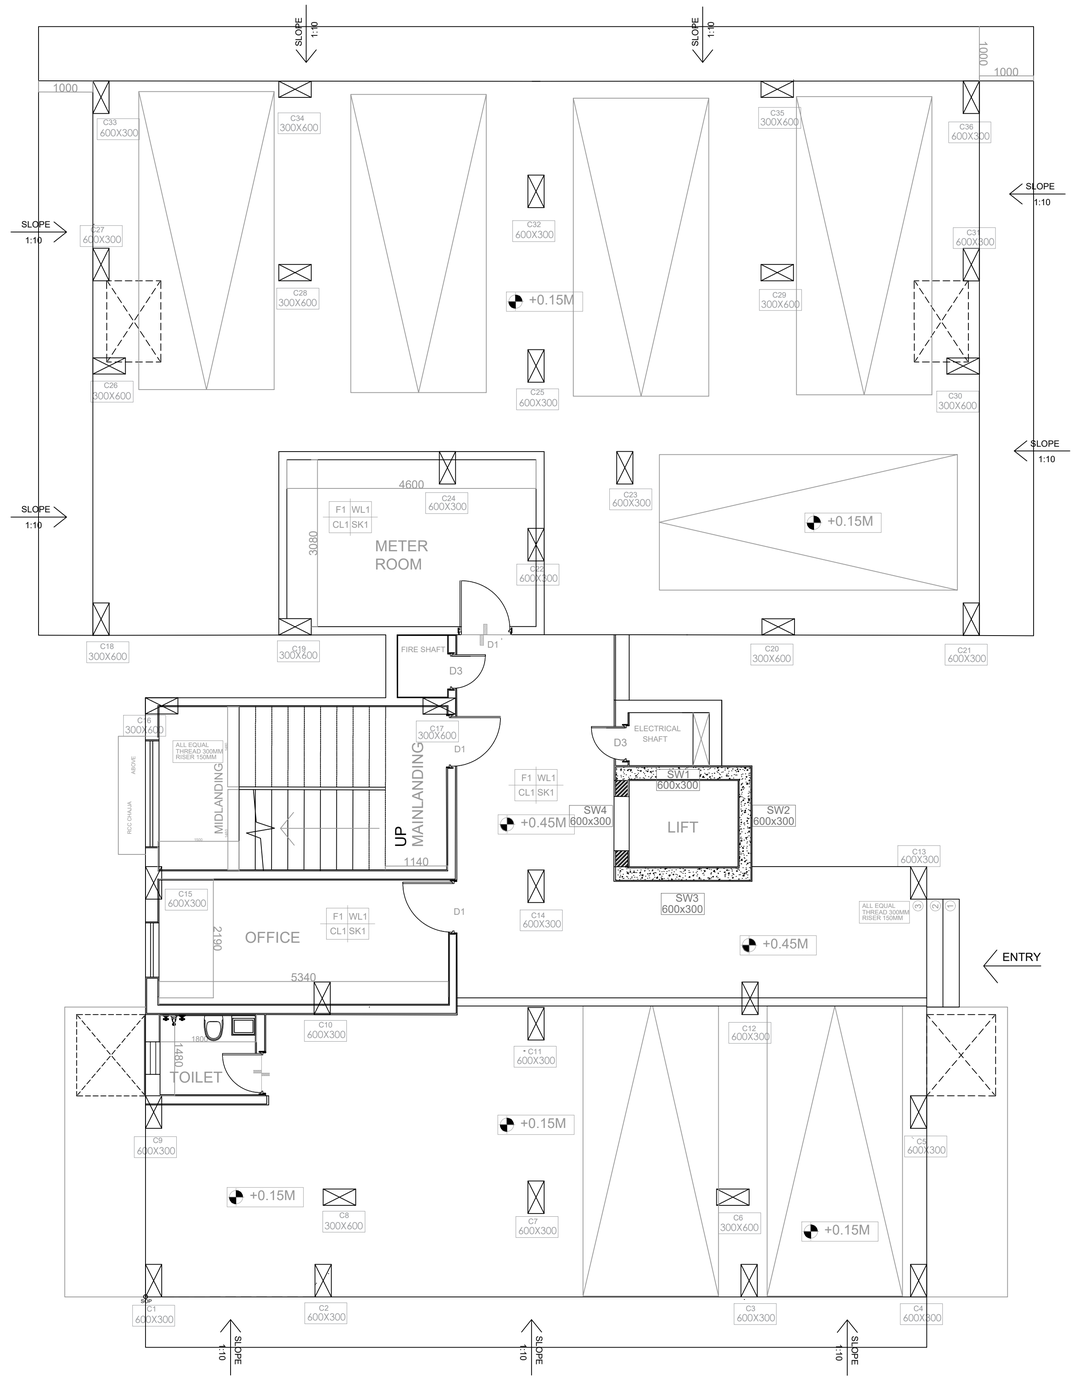

1)ALL DRAWINGS ARE PROPERTY OF MISS SEJAL LOKE
2)THE DRAWING SHALL NOT BE SCALED
3)WRITTEN DIMENSIONS ARE TO FOLLOWED
4)DIMENSIONS GIVEN ARE IN MM UNLESS AND UNTILL SPECIFIED AND ARE FROM UNFINISHED SURFACE
5)ALL INTERNAL PLASTER IS 12MM AND EXTERNAL PLASTER IS 20MM
6)ANY AMBIGUITY SHALL BE IMMEDIATELY BROUGHT TO THE NOTICE OF THE ARCHITECT
7)ALL EXTERNAL WALLS ARE 230MM AINTERNAL WALLS ARE 150MM UNLESS SPECIFIED

SCHEDULE OF COLUMN

TYPE	DESCRIPTION
⊠	9"X9" (230 X 230 MM) RCC COLUMN WITH 4 NO. 12 MM DIA. BARS
⊠	9"X4.5" (230 X 115 MM) RCC COLUMN WITH 4 NO. 12 MM DIA. BARS

SCHEDULE OF WINDOWS

TYPE	SIZE	SILL LVL	SPECIFICATIONS
W1	2000X2100	0.15M	ALLUMINIUM ANODISED FRAME, 3 SLIDING GLASS PANELLING SLIDING WINDOW
W2	1500X1200	0.9M	ALLUMINIUM ANODISED FRAME, 3 SLIDING GLASS PANELLING SLIDING WINDOW
W3	1000X1200	0.9M	ALLUMINIUM ANODISED FRAME, 2 SLIDING GLASS PANELLING SLIDING WINDOW
W4	600X600	1.5M	ALLUMINIUM ANODISED FRAME, LOUVRED WINDOW WITH GLASS SHUTTERS

SCHEDULE OF DOORS

D1	1000X2100	--	2.1M	GRANITE FRAMED SINGLE FLUSH DOOR IN VINEER FIN, WITH APPVD. MELAMINE POLISH WITH 1 HOUR FIRE RATING
D2	750X2100	--	2.1M	PVC WOODEN PLASTIC COMPOSITE(WPC) DOORS
D3	700X2100	--	2.1M	GRANITE FRAMED SINGLE FLUSH DOOR IN VINEER FIN, WITH APPVD. MELAMINE POLISH WITH 1 HOUR FIRE RATING
O1	1500X2100	--	2.1M	GRANITE FRAMED OPENING
O2	900X2100	--	2.1M	GRANITE FRAMED OPENING

SCHEDULE OF FINISHES

TYPE	DESCRIPTION	REMARK
WL1	12 MM THK PLASTER, 2 COATS OF WHITE WASH, 1 COAT OF 5 MM THK PUTTY, 1 COAT OF PRIMER, 3 COATS OF EMULSION PAINT	ALL INTERNAL WALLS OF LIVING ROOM, BEDROOM, KITCHEN AND PASSAGE
WL2	18 MM THK PLASTER, 2 COATS OF WHITE WASH, 3 COATS OF EXTERIOR PAINT OF APPROVED SHADE	ALL EXTERNAL WALLS INCLUDING BALCONY PARAPET
WL3	12 MM THK PLASTER, 12MM THK CERAMIC TILES 300MM X 600MM	ALL INTERNAL WALLS OF BATH AND W.C AND IN KITCHEN ABOVE PLATFORM
FL1	20 MM THK CEMENT SAND SCREED, 10 MM THK VITRIFIED TILES OF SIZE 600MM X 600MM	ALL INTERNAL FLOORINGS OF LIVING ROOM, BEDROOM, KITCHEN, BALCONY
FL2	20 MM THK WATER-PROOFING AGENT SCREED, 100 MM THK B.B.C. LAID TO SLOPE, 10 MM THK VITRIFIED ANTI-SKID TILES OF SIZE 600 X 600 MM	ALL BALCONIES AND TOILET FLOORING
SK1	10 MM THK VITRIFIED TILES OF SIZE 600MM X 75 MM	ALL INTERNAL WALLS OF LIVING ROOM, BEDROOM, KITCHEN AND PASSAGE
CL1	12 MM THK PLASTER, 2 COATS OF WHITE WASH, 1 COAT OF 5 MM THK PUTTY, 1 COAT OF PRIMER, 3 COATS OF EMULSION PAINT	ALL INTERNAL WALLS OF LIVING ROOM, BEDROOM, KITCHEN AND PASSAGE

REVISION

NO	DESCRIPTION	DATE	BY

COPIES ISSUED

NO	ISSUED TO	DATE	COPIES

PROJECT TITLE

PROPOSED RESIDENTIAL BUILDING (STILT+7)

DRAWING TITLE

STILT LEVEL

DWG NO. 7

NORTH

DRAWN BY SEJAL LOKE

CHECKED BY AR SHALINI

SCALE 1:50

SIGN AND STAMP

DATE 20/05/2020

ROLLNO 2017074

NAME AND ADDRESS

SEJAL LOKE
DR BALIRAM HIRAY COLLEGE OF ARCHITETCURE
KHERWADI, MUMBAI 400051